


32-1120  
gpm  
120-4235  
L/min

150 psi  
10 bar



The BTU unit with integral backflushing filter is a turnkey automatic filtration unit for watermiscible cooling lubricants, oils or washing water which continuously filters solid particles, such as very fine magnetic and non-magnetic metal particles, corundum, sand particles etc. It provides long-term filtration producing reduced-particle filtrate. The quality of the filtrate is dependent on the separation limit of the filter used.



A BTU unit generally consists of:

- Backflushing filter for the main filtration
- Process twist sieve (PTS) to treat the backflushed volume
- Buffer tank with components (only BTU1)
- Control


The process twist sieve (PTS) is a component which is fitted downstream from the backflushing filter to filter the backflushed volume. In this way, with the help of the twist sieve, a further filtration process is carried out via the backflushing line.

The solid particles from the backflushing volume are collected in a bag filter which is suspended under the twist sieve. When this is full, it is easy to dispose of by pulling open the drawer.


The fluid filtered by the twist sieve or the bag flows back to the buffer tank (BTU1). As soon as the fluid level in the buffer tank reaches the upper switch point of the level gauge (optional), the tank pump (optional) empties the tank.

Due to the short-term pressure shock when backflushing the automatic filter and due to the tangential inlet flow, the fluid is filtered by the wire mesh inside the twist sieve. Approx. 70 % of the backflushing volume passes through the twist sieve and is therefore already filtered when it flows into the buffer tank below the filter via the channel on one side of the twist sieve.

The remaining 30 % of fluid which is heavily contaminated with particles is forced by the centrifugal force and gravity through an opening in the floor of the twist sieve down into a bag filter. The fluid is filtered through the bag from the inside to the outside. Particles are retained and the cleaned emulsion flows into the buffer tank. The pressure shock ensures that the wire mesh (TopMesh) is flushed at every backflushing process, i.e. the twist sieve is self-cleaning and practically maintenance-free.

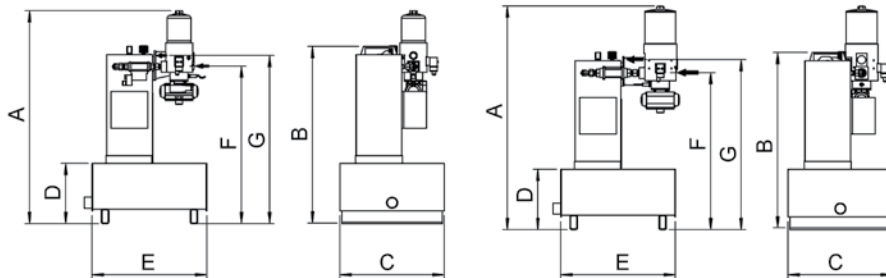

Type	A	B	C	D	E	F	G
BTU3 with RF3-CG	1162	972	570	330	626	860	917
BTU3 with RF3-OG	1223	972	570	330	626	860	929

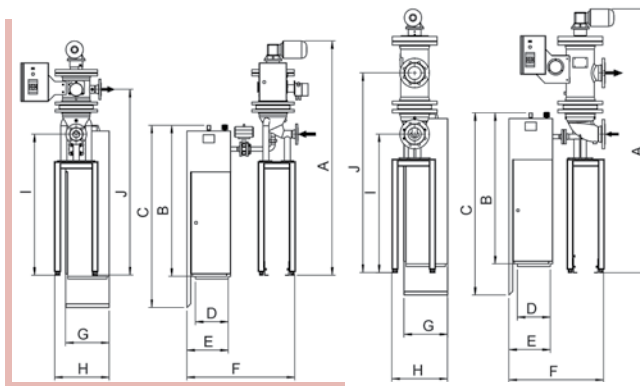

Type	A	B	C	D	E	F	G	H	I	J
BTU3 with RF3-CG	1877	1210	1460	264	332	867	350	437	1130	1488
BTU3 with RF3-OG	2113	1210	1460	264	332	760	350	446	1110	1600

# Backflush Treatment Unit



## How to Build a Valid Model Number for a BTU:

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6	BOX 7	BOX 8
BTU1							

Example: NOTE: One option per box

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6	BOX 7	BOX 8	
BTU1	80	PP	50	EE	S	T	X	= BTU1-80-P-50-EE-S-T-X

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6	BOX 7	BOX 8
<b>Unit Type</b> BTU1 = Add-on unit BTU3 = Tank-top unit	<b>Filtration Rating</b> 25 = D25 40 = D40 60 = D60 80 = D80 100 = D100 150 = D150	<b>Bag Filter Material</b> PE = Polyester PP = Polypropylene N = Nylon	<b>Bag Filter Filtration Rating</b> 25 = 25 µm 50 = 50 µm 100 = 100 µm 150 = 150 µm	<b>Twist Sieve Housing/ Buffer Tank Material</b> EE = Housing and buffer tank: stainless steel EN = Housing: stainless steel; buffer tank: carbon steel NN = Housing and buffer tank: carbon steel NE = Housing: carbon steel; buffer tank: stainless steel EEE = Housing, buffer tank, filter frame: stainless steel	<b>Control Functions</b> 0 = Unit without control function N1 = Level monitoring of buffer tank N2 = Level monitoring of bag filter N3 = Level monitoring of buffer tank and bag filter S = Control complete	<b>Pump</b> 0 = 150 psi (10 bar) T = Return pump in buffer tank (only possible with BTU1)	<b>Modification Number</b> X = The latest version is always supplied

## Filter Model Number Selection

- RF3-C
- RF3-0
- RF3-1
- RF3-2
- RF3-2.5
- RF3-3
- RF3-4
- RF3-5
- RF3-6
- RF3-7
- RF3-8
- RF5
- RF7
- RF10
- RF4
- RF4-1
- RF4-2
- RF12
- BTU**
- ATF
- PLF1
- PVD

## AutoFilt® Model Number Selection

### How to Build a Valid Model Number for an AutoFilt® for BTU:

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6	BOX 7	BOX 8
A							

Example: NOTE: One option per box

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6	BOX 7	BOX 8	
A	E	1	E	E	E	2	L	= A-E-1-E-E-E-2-L

BOX 1	BOX 2	BOX 3
<b>AutoFilt®</b>	<b>Control</b>	<b>Voltage</b>
A = RF3-C B = RF3-CG D = RF3-0 E = RF3-0G F = RF3-1 G = RF4-1 H = RF4-2	0 = w/o E = EPT	RF3 RF4 0 = w/o control 1 = 3x 400 V/N/PE, 50 Hz 2 = 3x 400 V/X/PE, 50 Hz 3 = 3x 500 V/X/PE, 50 Hz 4 = 3x 230 V/N/PE, 50 Hz 5 = 3x 230 V/X/PE, 50 Hz 6 = 3x 415 V/X/PE, 50 Hz 7 = 3x 415 V/N/PE, 50 Hz 8 = 3x 460 V/N/PE, 50 Hz
		M = with control*; with solenoid valve 230 V AC N = with control*; with solenoid valve 24 V DC O = w/o control*; with solenoid valve 230 V AC P = w/o control; with solenoid valve 24 V DC

BOX 4		
Materials Of Housing (RF3 Only)	Materials Of Housing (RF4-1 Only)	Materials Of Housing (RF4-2 Only)
0 = Carbon steel, external primer ("N") 1 = Carbon steel, external primer, internal coating ("NM") 3 = Stainless steel ("E")	AA = Configuration (AAE): aluminum, aluminum, stainless steel EE = Configuration (EEE): stainless steel, stainless steel, stainless steel	NN = Configuration (NNE): carbon steel, carbon steel, stainless steel EE = Configuration (EEE): stainless steel, stainless steel, stainless steel

BOX 5		BOX 6	
Materials Of Backflushing Valve		Differential Pressure Gauge	
RF3 N = Carbon Steel E = Stainless Steel	RF4 1 = Coaxial Valve 2 = Ball Valve	RF3 1 = Pressure Chamber Aluminum 2 = Pressure Chamber Stainless Steel 3 = With chemical seal/ Stainless Steel	RF4 F = Fixed value: 0.5 bar A = Adjustable: 0.1 - 1.0 bar G = GW indicator, N/C

BOX 7	BOX 8		
Flange Options (RF3 only)	Filter Elements (RF3)	(RF4-1)	(RF4-2)
1 = Filter outlet opposite filter inlet (standard) (not for RF3-C) 2 = Filter outlet offset by 90° clockwise to standard 3 = Filter outlet offset by 180° clockwise to standard	B = KD25 C = KD40 D = KD60 E = KD80 L = KS50 M = KS100 N = KS150	B = KMD25 C = KMD40 D = KMD60 E = KMD80 L = KMS50 M = KMS100 N = KMS150	B = KND25 C = KND40 D = KND60 E = KND80 L = KNS50 M = KNS100 N = KNS150

# Backflush Treatment Unit



## How to Build a Valid Model Number for a Process Twist Sieve:

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6	BOX 7	BOX 8	BOX 9
PTS								

Example: NOTE: One option per box

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6	BOX 7	BOX 8	BOX 9
PTS	40	250	E	L	2		50	

= PTS-40-250-E-L-2-50

BOX 1	BOX 2	BOX 3	BOX 4
<b>Unit Type</b>	<b>Filtration Rating</b>	<b>Diameter</b>	<b>Housing Material</b>
PTS = Process twist sieve	25 = D25 40 = D40 60 = D60 80 = D80 100 = D100 150 = D150	180 = Ø 180 mm (only for RF4, without) 180/1 = Ø 180 mm (only for RF4-1, with bracket) 180/2 = Ø 180 mm (only for RF4-2, with bracket) 250 = Ø 250 mm (only for RF3-C and RF3-0) 450 = Ø 450 mm (only for RF3-1)	N = Carbon steel, primed E = Stainless steel

BOX 5	BOX 6	BOX 7	BOX 8
<b>Housing Length</b>	<b>Level Switch</b>	<b>Bag Filter Material</b>	<b>Bag Filtration Rating</b>
K = Short (standard for PTS-180) L = Long (standard for PTS-250/-450)	0 = Without 1 = With level switch stainless steel (only for diameters 250 mm, 450 mm)	PE = Polyester PP = Polypropylene N = Nylon	25 = 25 µm 50 = 50 µm 100 = 100 µm 150 = 150 µm

BOX 9
<b>Modification Number</b>
X = The latest version is always supplied

## Process Twist Sieve Model Number Selection

- RF3-C
- RF3-0
- RF3-1
- RF3-2
- RF3-2.5
- RF3-3
- RF3-4
- RF3-5
- RF3-6
- RF3-7
- RF3-8
- RF5
- RF7
- RF10
- RF4
- RF4-1
- RF4-2
- RF12
- BTU
- ATF
- PLF1
- PVD