

# HydraSPIN Filter Series

# GH



## Features and Benefits

- Variety of differential indicator port options (visual and electrical indicators)
- Leak proof bar indicator, rugged visual indicator with protective aluminum shield is standard
- Proprietary bowl to element seal - minimizes potential leakage point by use of one seal on element
- Cartridge style element (non spin-on) that is proprietary and patented with integrated bypass valve features
- Wide variety of media grades that can be application specific
- Light weight bowl design with replaceable element minimizes landfill waste
- Mounting interchangeability with competitor's filter head
- The inherent capability to pre-print the perforated outer element wrap provides a branding solution that helps to capture after-market replacement element sales
- Same day shipment model available (GH6 & GH9)

**35-112 gpm** **GH**  
**130-425 L/min** **RLT**  
**500-725 psi**  
**35-50 bar** **KF5**

**SRLT**

Model No. of filters in photograph are GH6, GH9, GH11, and GH14.


	GH6	GH9	GH11	GH14
<b>Flow Rating:</b> (150 SUS (32cSt) fluids)	Up to 35 gpm (130 L/min)	Up to 35 gpm (130 L/min)	Up to 87 gpm (325 L/min)	Up to 112 gpm (425 L/min)
<b>Max. Operating Pressure:</b>	725 psi (50 bar)	725 psi (50 bar)	500 psi (35 bar)	500 psi (35 bar)
<b>Min. Yield Pressure:</b>	2600 psi (179 bar)	2600 psi (179 bar)	2700 psi (186 bar)	2700 psi (186 bar)
<b>Rated Fatigue Pressure:</b>	725 psi (50 bar)	725 psi (50 bar)	500 psi (35 bar)	500 psi (35 bar)
<b>Temp. Range:</b>	-20°F to 225°F (-29°C to 107°C)	-20°F to 225°F (-29°C to 107°C)	-22°F to 212°F (-30°C to 100°C)	-22°F to 212°F (-30°C to 100°C)
<b>Bypass Setting:</b>	25 psi (1.7 bar) standard 50 psi (3.5 bar) optional Non-Bypassing	25 psi (1.7 bar) standard 50 psi (3.5 bar) optional Non-Bypassing	43 psi (3 bar) standard 87 psi (6 bar) optional Non-Bypassing	43 psi (3 bar) standard 87 psi (6 bar) optional Non-Bypassing
<b>Porting Head:</b>	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum
<b>Element Case:</b>	Aluminum	Aluminum	Aluminum	Aluminum
<b>Weight:</b>	3.2 lbs (1.4 kg)	3.8 lbs (1.7 kg)	8.0 lbs (3.6 kg)	10.0 lbs (4.5 kg)
<b>Element Change Clearance:</b>	2" (50 mm)	2" (50 mm)	7.4" (187 mm)	7.4" (187 mm)

## Filter Housing Specifications

<b>Type Fluid</b>	Appropriate Schroeder Media
Petroleum Based Fluids	All media (synthetic) and H media (Hydraspin)

## Fluid Compatibility

## Dimensions (GH6 & GH9)

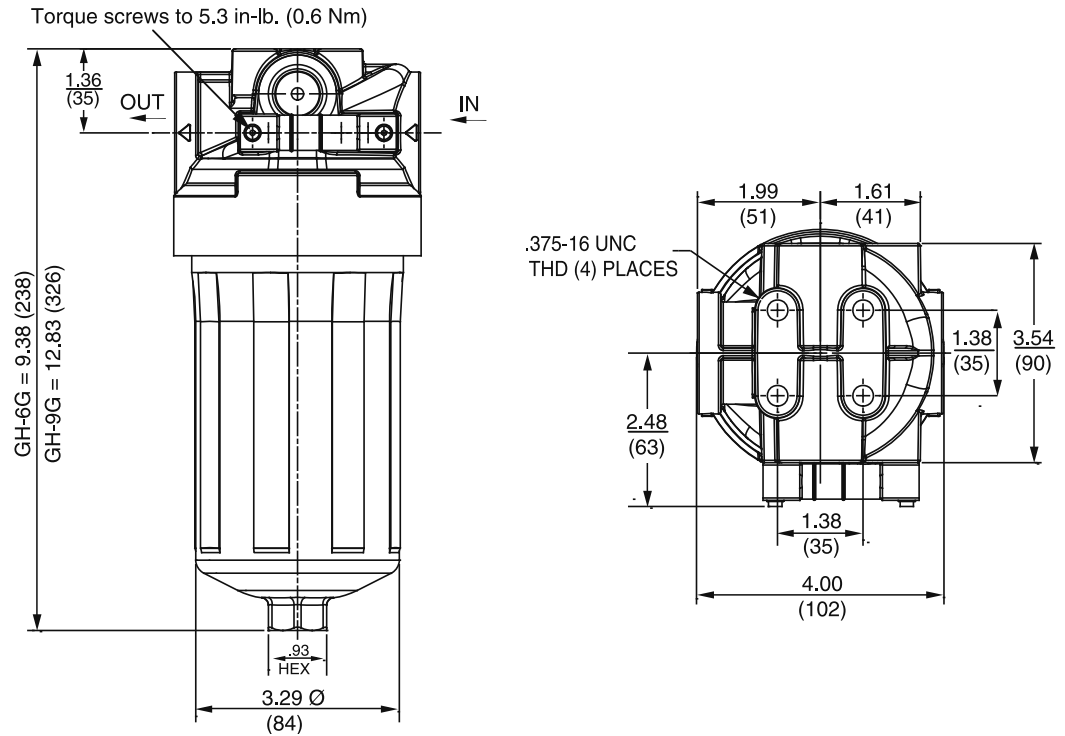

Metric dimensions in ( ).

## Element Performance Information & Dirt Holding Capacity

Media Type	Element	Filtration Ratio Per ISO 4572/NFPA T3.10.8.8 Using automated particle counter (APC) calibrated per ISO 4402			Filtration Ratio per ISO 16889 Using APC calibrated per ISO 11171	
		$\beta_x \geq 75$	$\beta_x \geq 100$	$\beta_x \geq 200$	$\beta_x(c) \geq 200$	$\beta_x(c) \geq 1000$
Resin Impregnated Cellulose Media	6G3/9G3	6.8	7.5	10.0	N/A	N/A
	6G10/9G10	15.5	16.2	18.0	N/A	N/A
Traditional Excellement® Z-Media®	6GZ3 / 9GZ3	<1.0	<1.0	<2.0	<4.0	4.8
	6GZ5 / 9GZ5	2.5	3.0	4.0	4.8	6.3
	6GZ10 / 9GZ10	7.4	8.2	10.0	8.0	10.0
	6GZ25 / 9GZ25	18.0	20.0	22.5	19.0	24.0
Hydraspin H Media, designed to specifically reduce filter pressure drop	6GH10/ 9GH10	N/A	N/A	N/A	10.6	13.0


Media Type	Element	DHC (gm)
Resin Impregnated Cellulose Media	6G3/9G3	18/30
	6G10/9G10	15/25
Traditional Excellement® Z-Media®	6GZ3 / 9GZ3	30/51
	6GZ5 / 9GZ5	24.5/42
	6GZ10 / 9GZ10	31/49
	6GZ25 / 9GZ25	34/58
Hydraspin H Media, designed to specifically reduce filter pressure drop	6GH10/9GH10	12/20

Element Collapse Rating: 250 psid (17.2 bar) for standard and non-bypassing elements

Flow Direction: Outside In

Element Nominal 6G: 3.25" (82 mm) O.D. x 5.7" (144 mm) long

Dimensions: 9G: 3.25" (82 mm) O.D. x 9.0" (229 mm) long

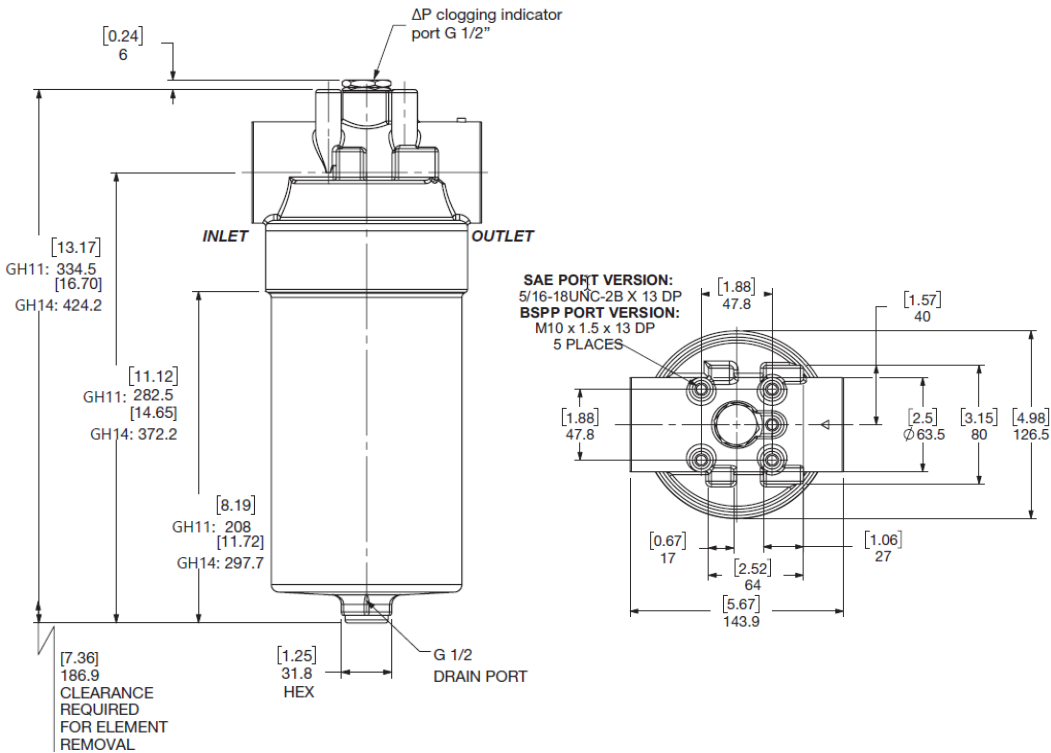

Metric dimensions in ( ).

Media Type	Element	Filtration Ratio Per ISO 4572/NFPA T3.10.8.8 Using automated particle counter (APC) calibrated per ISO 4402			Filtration Ratio per ISO 16889 Using APC calibrated per ISO 11171	
		$\beta_x \geq 75$	$\beta_x \geq 100$	$\beta_x \geq 200$	$\beta_x(c) \geq 200$	$\beta_x(c) \geq 1000$
Traditional Excellement® Z-Media®	11GZ3/14GZ3 11GZ5/14GZ5 11GZ10/14GZ10 11GZ25/14GZ25	Consult Factory			Consult Factory	

Media Type	Element	DHC (gm)
Traditional Excellement® Z-Media®	11GZ3/14GZ3 11GZ5/14GZ5 11GZ10/14GZ10 11GZ25/14GZ25	Contact Factory

Element Collapse Rating: 250 psid (17.2 bar) for standard and non-bypassing elements

Flow Direction: Outside In

Element Nominal Dimensions: 11G: 3.25" (82 mm) O.D. x 5.7" (144 mm) long  
 14G: 3.25" (82 mm) O.D. x 9.0" (229 mm) long

## Dimensions (GH11 & GH14)


- GH
- RLT
- KF5
- SRLT

## Element Performance Information & Dirt Holding Capacity

**Pressure Drop Information (GH6 & GH9)**  
Based on Flow Rate and Viscosity

$\Delta P_{\text{housing}}$


GH  $\Delta P_{\text{housing}}$  for fluids with sp gr (specific gravity) = 0.86:



$\Delta P_{\text{element}}$


6GZ

Element Pressure Drop versus Flow Rate at 32 cSt (150 SUS)

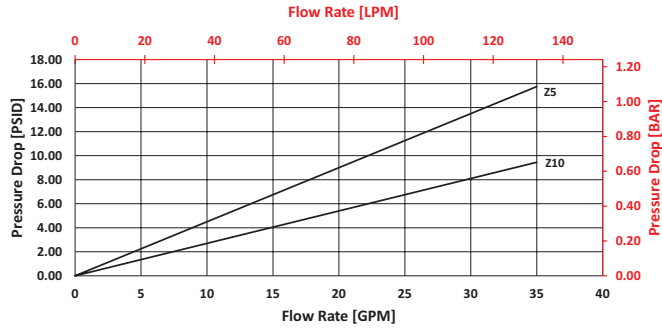

9GZ

Element Pressure Drop versus Flow Rate at 32 cSt (150 SUS)

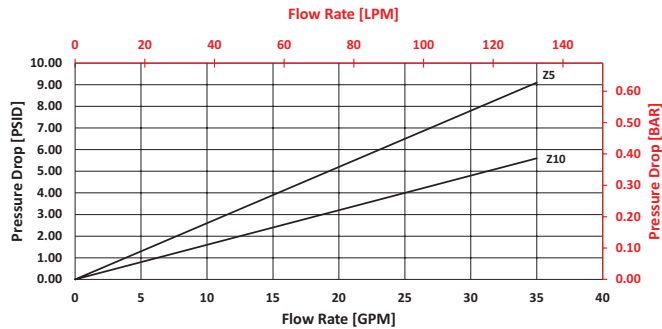

$$\Delta P_{\text{filter}} = \Delta P_{\text{housing}} + (\Delta P_{\text{element}} * V_f)$$

**Exercise:**

Determine  $\Delta P_{\text{filter}}$  at 15 gpm (57 L/min) for GH6GZ10S12L using 160 SUS (34 cSt) fluid.

Use the housing pressure curve to determine  $\Delta P_{\text{housing}}$  at 15 gpm. In this case,  $\Delta P_{\text{housing}}$  is 1.5 psi (0.10 bar) on the graph for the GH housing.

Use the element pressure curve to determine  $\Delta P_{\text{element}}$  at 15 gpm. In this case,  $\Delta P_{\text{element}}$  is 4 psi (0.27 bar) according to the graph for the 6GZ10 element.

Because the viscosity in this sample is 160 SUS (34 cSt), we determine the **Viscosity Factor ( $V_f$ )** by dividing the **Operating Fluid Viscosity** with the **Standard Viscosity** of 150 SUS (32 cSt). To best determine your Operating Fluid Viscosity, please reference the chart in Appendix D.

Finally, the overall filter pressure differential,  $\Delta P_{\text{filter}}$ , is calculated by adding  $\Delta P_{\text{housing}}$  with the true element pressure differential,  $(\Delta P_{\text{element}} * V_f)$ . The  $\Delta P_{\text{element}}$  from the graph has to be multiplied by the viscosity factor to get the true pressure differential across the element.

**Solution:**

$$\Delta P_{\text{housing}} = 1.5 \text{ psi [0.10 bar]} \quad | \quad \Delta P_{\text{element}} = 4 \text{ psi [0.27 bar]}$$

$$V_f = 160 \text{ SUS (34 cSt)} / 150 \text{ SUS (32 cSt)} = 1.1$$

$$\Delta P_{\text{filter}} = 1.5 \text{ psi} + (4 \text{ psi} * 1.1) = 5.9 \text{ psi}$$

**OR**

$$\Delta P_{\text{filter}} = 0.10 \text{ bar} + (0.27 \text{ bar} * 1.1) = 0.40 \text{ bar}$$

Note:


If your element is not graphed, you can obtain your  $\Delta P_{\text{element}}$  by multiplying the flow rate by the following:  $\Delta P_{\text{element}} \text{ Factors} * V_f$  (Visc. Factor)

$\Delta P_{\text{element}} \text{ Factors @ 150 SUS (32 cSt)}$

Ele.	$\Delta P$	Ele.	$\Delta P$
6G3	0.60	9G3	0.35
6G10	0.40	9G10	0.24
6G25	0.08	9G25	0.05
6GH10	C/F	9GH10	C/F
6GZ3	C/F	9GZ3	C/F
6GZ25	C/F	9GZ25	C/F

$\Delta P_{\text{housing}}$


GH  $\Delta P_{\text{housing}}$  for fluids with sp gr (specific gravity) = 0.86:

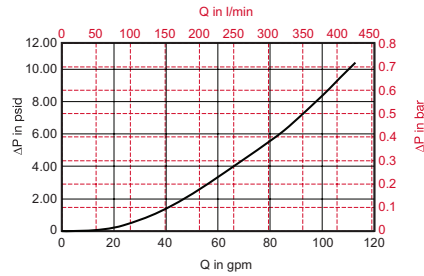

$\Delta P_{\text{element}}$


11GZ

Element Pressure Drop versus Flow Rate at 32 cSt (150 SUS)

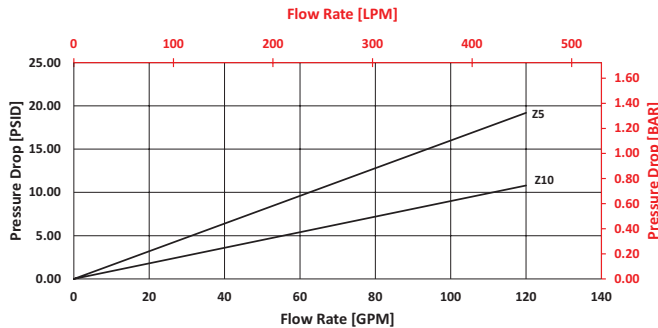

12GZ

Element Pressure Drop versus Flow Rate at 32 cSt (150 SUS)

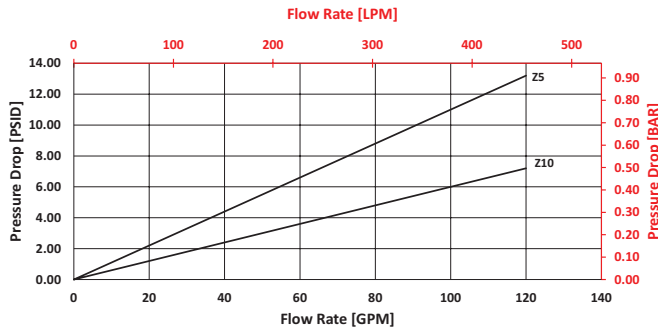

$$\Delta P_{\text{filter}} = \Delta P_{\text{housing}} + (\Delta P_{\text{element}} * V_f)$$

### Exercise:

Determine  $\Delta P_{\text{filter}}$  at 60 gpm (227.4 L/min) for GH11GZ10S24VA using 160 SUS (34 cSt) fluid.

Use the housing pressure curve to determine  $\Delta P_{\text{housing}}$  at 60 gpm. In this case,  $\Delta P_{\text{housing}}$  is 3 psi (0.21 bar) on the graph for the GH housing.

Use the element pressure curve to determine  $\Delta P_{\text{element}}$  at 60 gpm. In this case,  $\Delta P_{\text{element}}$  is 5 psi (0.34 bar) according to the graph for the 11GZ10 element.

Because the viscosity in this sample is 160 SUS (34 cSt), we determine the **Viscosity Factor ( $V_f$ )** by dividing the **Operating Fluid Viscosity** with the **Standard Viscosity** of 150 SUS (32 cSt). To best determine your Operating Fluid Viscosity, please reference the chart in Appendix D.

Finally, the overall filter pressure differential,  $\Delta P_{\text{filter}}$ , is calculated by adding  $\Delta P_{\text{housing}}$  with the true element pressure differential, ( $\Delta P_{\text{element}} * V_f$ ). The  $\Delta P_{\text{element}}$  from the graph has to be multiplied by the viscosity factor to get the true pressure differential across the element.

### Solution:

$$\Delta P_{\text{housing}} = 3 \text{ psi [0.21 bar]} \quad | \quad \Delta P_{\text{element}} = 5 \text{ psi [0.34 bar]}$$

$$V_f = 160 \text{ SUS (34 cSt)} / 150 \text{ SUS (32 cSt)} = 1.1$$

$$\Delta P_{\text{filter}} = 3 \text{ psi} + (5 \text{ psi} * 1.1) = 8.5 \text{ psi}$$

OR

$$\Delta P_{\text{filter}} = 0.21 \text{ bar} + (0.34 \text{ bar} * 1.1) = 0.58 \text{ bar}$$

**Pressure Drop Information (GH11 & GH14)**  
Based on Flow Rate and Viscosity

GH

RLT

KF5

SRLT


Note:  
If your element is not graphed, you can obtain your  $\Delta P_{\text{element}}$  by multiplying the flow rate by the following:  $\Delta P_{\text{element}} \text{ Factors} \times VP \text{ (Visc. Factor)}$   
 $\Delta P_{\text{element}} \text{ Factors @ 150 SUS (32 cSt)}$

Ele.	$\Delta P$
11GZ3	0.21
11GZ25	0.06
14GZ3	0.14
14GZ25	0.04


## Filter Model Number Selection (GH6 & GH9)

Highlighted product eligible for **QuickDelivery**


### How to Build a Valid Model Number for a Schroeder GH6/GH9:



Example: NOTE: One option per box




Filter Series	Element Length (in)	Element Part Number		Bypass Setting
GH	6	G3	= 3 μ E media (cellulose)	Omit = 25 psid 50 = 50 psid N = Non-bypassing
	9	G10	= 10 μ E media (cellulose)	
		G25	= 25 μ E media (cellulose)	
		GZ3	= 3 μ Excellement® Z-Media® (synthetic)	
		GZ5	= 5 μ Excellement® Z-Media® (synthetic)	
		GZ10	= 10 μ Excellement® Z-Media® (synthetic)	
		GZ25	= 25 μ Excellement® Z-Media® (synthetic)	
		GH10	= 10 μ Excellement® Hydraspin media	


Element Seal Material	Inlet Port	Dirt Alarm® Options	
Omit = Buna N	S12 = SAE-12	Omit = None	Indicator Location Option L 
	S16 = SAE-16	Visual	
	B12 = ISO 228 G-3/4"		
	B16 = ISO 228 G-1"		
		Electrical	
			Omit = None
			M = Drilled, tapped, plugged
			DTC = DC 2 wire, normally closed (NC)
			DTO = DC 2 wire, normally open (NO)
			DW = AC/DC 3-wire (NO or NC)

## Filter Model Number Selection (GH11 & GH14)

### How to Build a Valid Model Number for a Schroeder GH11/GH14:



Example: NOTE: One option per box



Filter Series	Element Length (in)	Element Part Number		Bypass Setting
GH	11	GZ3	= 3 μ Excellement® Z-Media® (synthetic)	Omit = 47 psid 87 = 87 psid N = Non-bypassing
	14	GZ5	= 5 μ Excellement® Z-Media® (synthetic)	
		GZ10	= 10 μ Excellement® Z-Media® (synthetic)	
		GZ25	= 25 μ Excellement® Z-Media® (synthetic)	

Element Seal Material	Inlet Port	Dirt Alarm® Options	
Omit = Buna N	B24 = ISO 228 G-1 1/2"	Omit = None	Indicator Location Option L
V = Viton	S24 = SAE 24 Straight Thread Ports	Visual	
		Electrical	
			VA = Visual pop-up w/auto reset
			VM = Visual pop-up w/manual reset
			VF = Visual analog
			EC = Electrical switch - SPDT
			ED = Electrical switch and LED light - SPDT

NOTES:

Box 2. Replacement element part numbers are a combination of Boxes 2, 3 and 4. Replacement elements contain bypass. For 50 psid setting or non-bypassing version, element part number includes suffix. Examples: 11GZ1050, 14GZ10N.

Box 7. VA and VM indicators are available with 50 psid bypass element only.