

# Cold Clear™ BCC900 Series

Cold Weather | Clear Biodiesel | The Clear Solution.

## Introductions

The new ASTM D6751 Cold Soak Filtration test is leaving many diesel/biodiesel producers and consumers "out in the cold". In response, Schroeder Fuels Filtration is proud to present ColdClear™, a new proprietary, patent pending, multi-stage separation technology designed specifically to ensure that diesel/biodiesel products conform to this ASTM standard for cold flow properties. The ColdClear™ system consists of a three-stage bank of housings using a combination of filtration and adsorption principles to capture compounds that could cause plugging or crystallization in diesel/biodiesel fluids. Notably, ColdClear™ is the premiere multi-stage treatment system for solving the cold soak filtration dilemma in diesel B100 biodiesel and biodiesel blends in a single pass while resulting in a negligible yield loss.



Model No. of image in photograph is BCC900VA48A48

## Features and Benefits

- ColdClear™ is a three stage system with all housings mounted in series on a single skid
- The first stage serves as a pre-filter and captures solid particulates down to three microns using high efficiency Excellement® cartridges
- Stages 2 and 3 utilize cartridges that combine adsorption technologies with the proven effectiveness of Schroeder's High efficiency Excellement® synthetic media
- The standard ColdClear™ system is equipped with 3" NPT, or 3" ANSI 150# flange ports and is designed to handle a maximum flow of 45 gpm for an estimated 120,000 gallons
- Multiple units can be employed to meet higher flow requirements
- The ColdClear™ system can be easily integrated into existing plant piping environments
- If multiple units are required, Schroeder Fuels Filtration offers a range of flow & system monitoring options to ensure proper operation
- The essence of the ColdClear™ technology is the removal of crystallization precursors from the diesel, biodiesel or biodiesel blends. Therefore knowing the exact flow rate of your system is essential for the ColdClear™ system to be properly sized and configured for specific application

## Specifications

**Flow:** Up to 45 gal/min (170 L/min)

**Max Operating Pressure:** 150 psi (10.3 bar)

**Operating Temperature:** 70°F optimal (40°F to 100°F)

**Pod Construction:** Steel

**Cartridge Type:** BCC39QPRE & BCC39QPOL

**Element Change Clearance:** 39" (990.6 mm)

ColdClear™ is only available through the Schroeder Fuel Filtration network of authorized distributors and representatives.


**Schroeder**  
**INDUSTRIES**

580 West Park Road | Leetsdale, PA 15056  
ph. 724.318.1100 | fax 724.318.1200

## Typical Applications

- In-plant treatment of biodiesel (B100) conform to ASTM standards prior to blending or shipment
- In-plant treatment of diesel/biodiesel blends (ex. B5, B10, etc) to ensure blended biodiesel meets or exceeds cold flow specifications
- For use in diesel fuel storage and distribution systems where diesel B100 or biodiesel blends are stored and distributed to ensure shipped blends conform to ASTM specifications
- Large fleet terminals that have on-site diesel (and biodiesel blend) storage to ensure tight adherence to cold flow standards
- Pre-treatment of fats and oils prior to processing

## Drawing

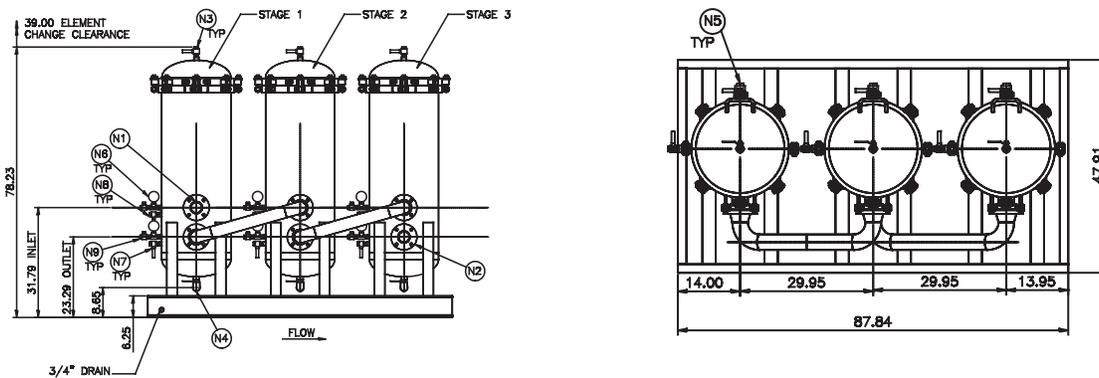

## Ordering Information

### How to Build a Valid Model number for a Schroeder BCC900:

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6
BCC900					

**Example:** NOTE: One option per box

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6
BCC900	V	P48	P48	RD5	UU

= BCC900VP48P48RD5UU

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6
<b>Model Code</b>	<b>Seals</b>	<b>Inlet Porting</b>	<b>Outlet Porting</b>	<b>Stage 1 Indicator</b>	<b>Test Points</b>
BCC900	V = Viton	P48 = 3" NPT A48 = 3" ANSI 150# Flange	P48 = 3" NPT A48 = 3" ANSI 150# Flange	Omit = None RD5 = Visual Pop-up DPG1 = Differential pressure gauge RMS10 = Electrical w/ DIN connector (male end only)	Omit = None  UU = Test points in each stage

### Replacement Cartridges

Stage 1 Cartridge	BCC39QPRE
Stage 2 & 3 Cartridges	BCC39QPOL